

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 085 515 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
21.03.2001 Bulletin 2001/12

(51) Int Cl.7: **G11B 27/32, G11B 27/034,  
G11B 27/10, G11B 20/12,  
H04N 5/85**

(21) Application number: 00307968.8

(22) Date of filing: 14.09.2000

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: 17.09.1999 JP 26463099

(71) Applicant: **SONY CORPORATION**  
Tokyo 141 (JP)

(72) Inventors:  
• Yamada, Makoto  
Shinagawa-ku, Tokyo 141 (JP)  
• Tsujii, Satoshi  
Shinagawa-ku, Tokyo 141 (JP)  
• Ishizaka, Toshihiro  
Shinagawa-ku, Tokyo 141 (JP)

(74) Representative: **Pratt, Richard Wilson et al**  
D. Young & Co,  
21 New Fetter Lane  
London EC4A 1DA (GB)

**(54) Recording apparatus, recording method, and disc shaped record medium**

(57) A digital recording apparatus using a disc shaped record medium is disclosed, that comprises a means for extracting outlined information of each of a plurality of files recorded on the disc shaped record medium, a means for correlating the extracted outlined in-

formation and the plurality of files and generating an index file, and a means for recording the index file to a predetermined position of the disc shaped record medium, wherein when a predetermined operation mode is performed, a plurality of types of data of the plurality of files are output in a predetermined format.

**EP 1 085 515 A2**

## Description

### BACKGROUND OF THE INVENTION

#### Field of the Invention

[0001] The present invention relates to a record apparatus, a recording method, and a disc shaped record medium. Embodiments of the invention allow a reproducing operation and/or an editing operation to be easily performed.

#### Description of the Related Art

[0002] In a recording apparatus such as a camcorder that records video data and/or audio data, several pictures and a sound thereof are recorded as a file. Such a recording and reproducing apparatus may have a display portion such as a liquid crystal display panel and a sound generating portion such as a speaker that allow recorded data to be reproduced and/or edited. In such a recording and reproducing apparatus, when a random-accessible record medium such as a magneto-optical disc is used, the user can designate a file so as to select his or her desired program to be reproduced or edited.

[0003] In recent years, as a multi-media system software program, QuickTime is known. The QuickTime is a software program that allows data that varies on time base (this data is referred to as movie) to be handled. A movie contains a moving picture, a voice, and a text. Currently, a QuickTime file format is available as a Macintosh platform of Apple. The QuickTime file format is an MPEG-1 (Moving Picture Experts Group phase 1) program stream file storage format of which a video elementary stream and an audio elementary stream are multiplexed on time base). In the storage format, the entire MPEG-1 file (namely, one whole closed scene) is treated as a sample of the QuickTime file format regardless of the duration thereof. Such a large sample is treated as one large chunk.

[0004] In addition, audio data and video data are stored together on one track (or one medium) in the QuickTime file format. As a new medium type that represents such data portions contained in a large sample or a large chunk, MPEG Media has been defined.

[0005] In this case, a file is designated by inputting for example a file name or the like. However, when many files have been recorded, since it is difficult for the user to memorize a file name and so forth of a file for which he or she wants to perform a reproducing operation, an editing operation, or the like, the operability of the apparatus may deteriorate.

#### SUMMARY OF THE INVENTION

[0006] A embodiment of the present invention seeks to provide a recording apparatus, a recording medium,

and a disc shaped record medium that allow a reproducing operation and/or an editing operation to be easily performed.

[0007] A first aspect of the present invention is a digital recording apparatus using a disc shaped record medium, comprising a means for extracting outlined information of each of a plurality of files recorded on the disc shaped record medium, a means for correlating the extracted outlined information and the plurality of files and generating an index file, and a means for recording the index file to a predetermined position of the disc shaped record medium, wherein when a predetermined operation mode is performed, a plurality of types of data of the plurality of files are output in a predetermined format.

[0008] A second aspect of the present invention is a digital recording method using a disc shaped record medium, comprising the steps of extracting outlined information of each of a plurality of files recorded on the disc shaped record medium, correlating the extracted outlined information and the plurality of files and generating an index file, and recording the index file to a predetermined position of the disc shaped record medium, wherein when an operation mode including a reproducing operation is performed, a plurality of types of data of the plurality of files are output in a predetermined format.

[0009] A third aspect of the present invention is a disc shaped record medium for recording a plurality of files and an index file, the index file correlating outlines information of the plurality of files and the plurality of files, the index file being recorded at a predetermined position of the disc shaped record medium.

[0010] According to the present invention, outlined information of each of a plurality of files recorded on a disc shaped record medium is output. Desired data can be easily searched from the outlined information.

[0011] The applicant of the present invention has the following patents:

- (1) US Patent No. 4,945,475
- (2) US Patent No. 5,253,053
- (3) US Patent No. 5,652,879

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0012] A better understanding of the present invention will become apparent in light of the following illustrative description of embodiment thereof, as illustrated in the accompanying drawings, in which:

Fig. 1 is a block diagram showing an example of the structure of a digital recording and reproducing apparatus according to an embodiment of the present invention;

Fig. 2 is a schematic diagram showing an example of the outer shape of the embodiment of the present invention;

Fig. 3 is a schematic diagram showing an example

of indication portions displayed on a display panel;  
Fig. 4 is a schematic diagram showing an example  
of a QuickTime movie file;

Fig. 5 is a schematic diagram showing an example  
of an index file according to an embodiment of the  
present invention;

Fig. 6 is a table for explaining a property track in  
detail;

Fig. 7 is a table for explaining property data in detail;

Fig. 8 is a table for explaining a part of the property  
data in more detail;

Fig. 9 is a table for explaining a title track in detail;

Fig. 10 is a table for explaining a thumbnail track in  
detail;

Fig. 11 is a table for explaining an intro-music track  
in detail;

Fig. 12 is a schematic diagram for explaining a des-  
ignation for real data on the property track and so  
forth;

Fig. 13 is a schematic diagram for explaining a des-  
ignation issued from another file for a part of data  
contained in a move data portion;

Fig. 14 is a schematic diagram for explaining a hi-  
erarchical structure of a directory; and

Fig. 15 is a schematic diagram for explaining a  
record position of an index file.

#### DETAILED DESCRIPTION OF THE ILLUSTRATIVE EMBODIMENTS

**[0013]** Fig. 1 shows an example of the structure of a  
digital recording and reproducing apparatus according  
to an embodiment of the present invention. An optical  
system (not shown) photographs a picture and supplies  
photographed light thereof to an image pickup device  
such as a CCD (Charge Coupled Device). The CCD  
generates a video signal corresponding to the photo-  
graphed light and supplies the generated video signal  
to a video encoder 1 shown in Fig. 1. The video encoder  
1 compression-encodes the video signal. In addition, an  
audio signal generating portion such as a microphone  
generates an audio signal and supplies it to an audio  
encoder 2. The audio encoder 2 compression-encodes  
the audio signal. The compression-encoding method  
applied for the video signal and the audio signal is for  
example MPEG. Output signals of the video encoder 1  
and the audio encoder 2 are referred to as elementary  
streams.

**[0014]** When MPEG is used, the video encoder 1 is  
composed of a motion predicting portion, a picture se-  
quence rearranging portion, a subtracting portion, a  
DCT portion, a quantizing portion, a variable length code  
encoding portion, and a buffer memory. The motion pre-  
dicting portion detects a moving vector. The subtracting  
portion forms a predictive error between an input picture  
signal and a locally decoded picture signal. The DCT  
portion transforms an output signal of the subtracting  
portion corresponding to the DCT method. The quantiz-

ing portion quantizes an output signal of the DCT por-  
tion. The variable length encoding portion encodes an  
output signal of the quantizing portion into a signal hav-  
ing a variable length. The buffer memory outputs the en-  
coded data at a constant data rate. The picture se-  
quence rearranging portion rearranges the sequence of  
pictures corresponding to the encoding process. In oth-  
er words, the picture sequence rearranging portion re-  
arranges the sequence of pictures so that after I and P  
pictures are encoded, a B picture is encoded. The local  
decoding portion is composed of an inverse quantizing  
portion, an inverse DCT portion, an adding portion, a  
frame memory, and a motion compensating portion. The  
motion compensating portion performs all of a forward  
predicting operation, a reverse predicting operation, and  
a bidirectional predicting operation. When the intra en-  
coding process is performed, the subtracting portion di-  
rectly passes data, not performs the subtracting proc-  
ess. The audio encoder 2 comprises a sub-band encod-  
ing portion and an adaptively quantized bit allocating  
portion.

**[0015]** As an example, in the case of a portable disc  
recording and reproducing apparatus with a built-in  
camera, a picture photographed by the camera is input  
as video data. In addition, a voice collected by a micro-  
phone is input as audio data. The video encoder 1 and  
the audio encoder 2 convert analog signals into digital  
signals. According to the embodiment of the present in-  
vention, a rewritable optical disc is used as a record me-  
dium. Examples of such an optical disc are a magneto-  
optical disc and a phase-change type disc. According to  
the embodiment of the present invention, a magneto-  
optical disc having a relatively small diameter is used.

**[0016]** Output signals of the video encoder 1 and the  
audio encoder 2 are supplied to a file generator 5. The  
file generator 5 converts output signals of the video en-  
coder 1 and the audio encoder 2 into a video elementary  
stream and an audio elementary stream so that they can  
be handled corresponding to a computer software pro-  
gram for synchronously reproducing a moving picture  
and a sound without need to use a dedicated hardware  
portion. According to the embodiment of the present in-  
vention, for example, as such a software program,  
QuickTime is used. QuickTime is a software program  
that allows various types of data such as a still picture,  
a text, an audio sound, and MIDI (Musical Instrument  
Digital Interface) as well as a moving picture to be han-  
dled and controlled on time base. A file that contains  
various types of data using QuickTime is referred to as  
QuickTime movie file.

**[0017]** The file generator 5 multiplexes encoded video  
data and encoded audio data. To generate a QuickTime  
movie file, a system controlling microcomputer 9 con-  
trols the file generator 5. An index file according to the  
embodiments of the present invention is also generated  
by the file generator 5.

**[0018]** QuickTime movie files generated by the file  
generator 5 are successively written to a memory 7

through a memory controller 8. When the system controlling microcomputer 9 issues a data write request for a disc to the memory controller 8, the memory controller 8 reads a QuickTime movie file from the memory 7. In this example, the transfer rate of the encoding process for a QuickTime movie file is lower than that for data written to the disc. For example, the former is half of the latter. Thus, although QuickTime movie files are successively written to the memory 7, they are intermittently read from the memory 7 under the control of the system controlling microcomputer 9 in such a manner that the memory 7 is prevented from overflowing or underflowing.

**[0019]** A QuickTime movie file that is read from the memory 7 through the memory controller 8 is supplied to an error correction encoder/decoder 11. The error correction encoder/decoder 11 temporarily writes a QuickTime movie file to a memory 10. The error correction encoder/decoder 11 performs an interleaving process and an error correction code encoding process so as to generate redundant data. The error correction encoder/decoder 11 reads the QuickTime movie file with redundant data from the memory 10.

**[0020]** Output data of the error correction encoder/decoder 11 is supplied to a data modulator/demodulator 13. When digital data is recorded on the disc, the data modulator/demodulator 13 modulates the data in such a manner that a clock signal can be easily extracted so that data can be recorded on a disc free from a problem such as an inter-code interference.

**[0021]** An output signal of the data modulator/demodulator 13 is supplied to a magnetic field modulating driver 14. In addition, a signal for driving an optical pickup 23 is output to the magnetic field modulating driver 14. The magnetic field modulating driver 14 drives a magnetic field head 22 corresponding to the input signal so as to apply a magnetic field to an optical disc 20. The optical pickup 23 radiates a recording laser beam to the optical disc 20. In such a manner, data is recorded on the optical disc 20. The optical disc 20 is rotated at CLV (Constant Linear Velocity), CAV (Constant Angular Velocity), or ZCAV (Zone CLV of which the disc surface area is divided into for example three areas in each of which the optical disc 20 is rotated at CAV in such a manner that the velocity of the innermost area is the highest and the velocity of the outermost area is the lowest) so that their linear velocities nearly become the same.

**[0022]** Since data that is intermittently read from the memory controller 8 is recorded to the optical disc 20, data is not successively recorded. In other words, after a predetermined amount of data is recorded, the recording operation is stopped until the next record request is received.

**[0023]** When the system controlling microcomputer 9 issues a request to a drive controlling microcomputer 12, it issues a request to a servo circuit 15 so as to control the entire disc drive. Thus, the disc drive performs a recording operation. The servo circuit 15 performs a

disc radial moving servo operation, a tracking servo operation, and a focus servo operation for the optical pickup 23. In addition, the servo circuit 15 performs a spindle servo operation for a motor 21. In association with the system controlling microcomputer 9, a user operation input portion (not shown) is disposed.

**[0024]** Next, the structure and operation of the reproducing portion will be described. When data is reproduced, a reproducing laser beam is radiated to the optical disc 20. A detector of the optical pickup 23 converts the reflected light of the optical disc 20 into a reproduction signal. A tracking error and a focus error are detected from an output signal of the detector of the optical pickup 23. The servo circuit 15 controls the optical pickup 23 so that the optical pickup 23 is placed and focused on a desired track. In addition, the servo circuit 15 controls the radial movement of the optical pickup 23 so that it reproduces data on a desired track of the optical disc 20.

**[0025]** As with the recording operation, when data is reproduced, the transfer rate of data reproduced from the optical disc 20 is higher than that of a QuickTime movie file. For example, the transfer rate of data reproduced from the optical disc 20 is twice as large as the transfer rate of a QuickTime movie file. Likewise, data is not successively reproduced from the optical disc 20. In other words, an intermittent reproducing operation is performed in such a manner that after a predetermined amount of data is reproduced, the reproducing operation is stopped until the next reproducing request is received. As with the recording operation, in the reproducing operation, when the system controlling microcomputer 9 issues a request to the drive controlling microcomputer 12, it issues a request to the servo circuit 15 so as to control the entire disc drive.

**[0026]** The reproduction signal that is output from the optical pickup 23 is input to the data modulator/demodulator 13. The data modulator/demodulator 13 demodulates the reproduction signal. The demodulated data is supplied to the error correction encoder/decoder 11. The error correction encoder/decoder 11 temporarily writes the reproduction data to the memory 10. The error correction encoder/decoder 11 performs a deinterleaving process and an error correcting process for the reproduction data. The error-corrected QuickTime movie file is written to the memory 7 through the memory controller 8.

**[0027]** A QuickTime movie file written to the memory 7 is output to a file decoder 6 in synchronization with a demultiplexing timing corresponding to a request issued by the system controlling microcomputer 9. The system controlling microcomputer 9 supervises the amount of data that is reproduced from the optical disc 20 and written to the memory 7 and the amount of data that is read from the memory 7 and output to the file decoder 6 so as to successively reproduce the video signal and the audio signal. In addition, the system controlling microcomputer 9 controls the memory controller 8 and the

drive controlling microcomputer 12 so as to read data from the optical disc 20 in such a manner that the memory 7 does not overflow or underflow.

**[0028]** The file decoder 6 decodes a QuickTime movie file into a video elementary stream and an audio elementary stream under the control of the system controlling microcomputer 9. The video elementary stream is supplied to a video decoder 3. The audio elementary stream is supplied to an audio decoder 4. The video elementary stream and the audio elementary stream are synchronously output from the file decoder 6.

**[0029]** The video decoder 3 and the audio decoder 4 compression-decode the video elementary stream and the audio elementary stream and generate a video output signal and an audio output signal, respectively. In this example, the video signal and the audio signal have been encoded corresponding to MPEG. The video decoder 3 is composed of a buffer memory, a variable length code decoding portion, an inverse DCT portion, an inverse quantizing portion, an adding portion, and a local decoding portion. The adding portion adds an output signal of the inverse quantizing portion and a local decoded output signal. The local decoding portion is composed of a picture sequence rearranging portion, a frame memory, and a motion compensating portion.

**[0030]** When an intra encoding process is performed, the adding portion directly passes data, not performs the adding process. Decoded data is output from the adding portion to the picture sequence rearranging portion. The picture sequence rearranging portion rearranges the decoded pictures in the original order. Output data of the video decoder 3 is supplied to a display portion (not shown). The display portion is for example an LCD (Liquid Crystal Display). The output data of the video decoder 3 may be supplied to an external picture display device through an external output terminal. Output data of the audio decoder 4 is supplied to a sound generating portion (not shown). The sound generating portion is for example a speaker. Alternatively, the output data of the audio decoder 4 may be supplied to an external audio generating device through an external output terminal.

**[0031]** As was described above, since the optical disc 20 on which data is recorded is attachable and detachable, the data recorded on the optical disc 20 can be reproduced by another apparatus. For example, a personal computer that operates with QuickTime application software may read data recorded on the optical disc 20 and reproduce video data and audio data therefrom. It should be noted that the present invention can be applied to an apparatus that handles only video data or only audio data.

**[0032]** Fig. 2 is a perspective view showing the external structure of the embodiment of the present invention. Referring to Fig. 2, a lens 210 is an objective lens disposed at the forward end of the optical system. A display panel 220 displays a reproduced picture and indications corresponding to an operation mode. The display panel 220 has a display device such as an LCD and a piezo-

electric device. By touching each indication portion with a pointing device 230, the user or the like can input an operation command for a reproducing operation and so forth.

**[0033]** When a random-accessible disc shaped record medium is used, the user can select a desired file by inputting for example a file name thereof. However, when many files have been recorded on the record medium, it is difficult for the user to memorize the file name of the desired file. Thus, the operability for the reproducing operation and the editing operation may deteriorate. To solve such a problem, according to the embodiment of the present invention, as shown in Fig. 3, representative pictures P1 to P9 (referred to as thumbnail pictures) of for example nine files are displayed on the display panel 220 so that the user can select a desired file with reference thereto. When the user presses a desired thumbnail picture with the pointing device 230, he or she can select the desired file.

**[0034]** When the user presses indication portions 223, 224, 225, 226, 227, and 228 with the pointing device 230, he or she can input his or her desired command for a reproducing operation, an editing operation, or the like for a selected file. In this example, a sound corresponding to the picture selected with the pointing device 230 can be reproduced for a predetermined time period (for example, several seconds).

**[0035]** An indication portion 221 indicates an operation mode such as a reproducing and editing operation, a recording operation, or the like. On the other hand, an indication portion 222 indicates a recordable remaining time period. An indication portion 229 indicates a scroll bar that allows thumbnail pictures that cannot be displayed at a time to be displayed corresponding to a scrolling operation of an indication portion 229a operated with the pointing device 230. Thus, even if more than nine thumbnails have been recorded, they can successively displayed by the scrolling operation.

**[0036]** As a method for searching a file, according to the embodiment of the present invention, an index file that contains a set of parts of picture data and/or audio data of a plurality of files recorded on the disc shaped record medium is generated. The generated index file is recorded at a predetermined position of the disc shaped record medium. The index file can be generated in for example the QuickTime movie file format.

**[0037]** Next, a QuickTime movie file will be described. Fig. 4 shows an example of a QuickTime movie file that allows both audio data and video data to be handled. The major structural portions of a QuickTime movie file are a movie resource portion and a movie data portion. The movie resource portion contains data that represents the duration for reproducing the file and data for referencing real data. The movie data portion contains real data of video data, audio data, and so forth.

**[0038]** Next, the movie resource portion will be described in detail. The movie resource portion contains a movie header 41 and tracks. The movie header 41 con-

tains general file information. There are a plurality of tracks corresponding to the number of types of data. Fig. 4 shows an example of the internal structure of a video track 50 in detail. The video track 50 contains a track header 42 and a medium portion. The track header 42 contains general track information. The medium portion contains a medium header 43, a medium handler 44, and a medium information portion. The medium header 43 contains general medium information. The medium handler 44 contains medium data handling information.

**[0039]** The medium information portion contains a medium handler 45, a data handler 46, data information 47, and a sample table. The medium handler 45 contains picture medium information. The data handler 46 contains picture data handling information. The data information 47 contains data information. The sample table contains a sample description, a time-to-sample, a sample size 48, a sample-to-chunk, a chunk offset 49, a sync sample, and so forth. The sample description contains each sample. The time-to-sample represents the relation between a sample and the time base. The sample size 48 represents the size of the sample. The sample-to-chunk represents the relation between the sample and the chunk. The chunk offset 49 represents the start byte position of the chunk in the movie file. The sync sample contains synchronous information. In the QuickTime movie file format, the minimum data unit (for example, a picture in MPEG encoded data) is treated as a sample. As a set of samples, a chunk is defined. To improve the accessibility of data that is recorded and reproduced, successive samples are recorded in a chunk. An audio track 51 has a structure (not shown) similar to that of a video track.

**[0040]** On the other hand, the movie data portion contains audio data encoded corresponding to for example MPEG Audio Layer 2 and picture data encoded in the compression-encoding method corresponding to for example MPEG (Moving Picture Expert Group) method in the unit of chunks each of which is composed of a predetermined number of samples. However, it should be noted that the present invention is not limited to such an encoding method. In addition, the moving data portion may contain linear data that has not been compression-encoded.

**[0041]** Each track of the movie resource portion is correlated with data contained in the movie data portion. In other words, in the example shown in Fig. 3, since audio data and video data are handled, the movie resource portion contains a video track and an audio track. The movie data portion contains real data of the audio data and real data of the video data. When other types of data are handled, the movie resource portion contains their tracks and the movie data portion contains real data thereof. For example, when a text and MIDI are handled, the movie resource portion contains tracks of the text and the MIDI and the movie data portion contains real data thereof.

**[0042]** According to the embodiment of the present in-

vention, an index file is generated with a QuickTime movie file. The index file handles data corresponding to types of data handled in a file to be searched. In this example, it is assumed that a file to be searched contains video data and audio data (hereinafter this file is referred to as AV file). In this case, the index file handles four types of data that are a property, a title, a thumbnail picture, and an intro-music. The property represents the attribute of the AV file. The title represents the title of the AV file. The thumbnail picture is a representative picture of for example the first picture of the AV file. The intro-music is typical audio data of for example the first several seconds of the AV file.

**[0043]** Fig. 5 shows an example of the structure of the index file generated with a QuickTime movie file. In this example, the movie resource portion contains tracks corresponding to four types of data that are a property track 62, a title track 63, a thumbnail picture track 64, and an intro-music track 65 as well as a movie header 61. However, only the property track 62 is an essential track. The other tracks are used corresponding to the types of data that the index file handles. In this example, the movie data portion contains four types of real data that are a property, a title, a thumbnail picture, and an intro-music. Likewise, only the property data is essential data. The other types of real data are used corresponding to the types of data that the index file handles.

**[0044]** Fig. 6 shows a table of an example of the property track 62. Each of AV File Property #1, AV File Property #2, ..., and AV File Property #n defined as chunks of properties of individual AV files has a data length (variable length represented in bytes) (L\_AP1, L\_AP2, ..., and L\_APn) and a start byte position (0, L\_AP1, L\_AP1 + L\_AP2, ...).

**[0045]** Fig. 7 shows an example of property data (real data) of each AV file. One byte starting with byte 0 represents version information. Two bytes starting with byte 1 represent a flag area (that will be described later). One byte starting with byte 3 represents a data type such as a moving picture, a still picture, audio, or the like. Four bytes starting with byte 4 represents date and time of creation of the AV file. Four bytes starting with byte 8 represents date and time of last change of the AV file.

**[0046]** Four bytes starting with byte 12 represent the duration of the reproduction of the AV file. L\_F1 bytes (variable bytes) starting with byte 16 represent the file name of the AV file. Thus, as was described above, the data lengths of property data of the AV files are represented as variable length L\_AP1, L\_AP2, ..., and L\_APn.

**[0047]** Fig. 8 shows an example of the structure of the flag area. When the recorded data is a file, bit 0 is 0. When the recorded data is a set of grouped files or a directory, bit 0 is 1. When there is no file to be referenced to the AV file, bit 1 is 0. When there is a file to be referenced to the AV file, bit 1 is 1. When the AV file does not contain a title, bit 2 is 0. When the AV file contains a title, bit 2 is 1. When the index file contains data of a title, bit

3 is 0. When data of a title is contained in an AV file designated by property data, bit 3 is 1. When the AV file does not contain a thumbnail picture, bit 4 is 0. When the AV file contains a thumbnail picture, bit 4 is 1.

**[0048]** When the index file contains data of a thumbnail picture, bit 5 is 0. When an AV file designated by property data contains data of a thumbnail picture, bit 5 is 1. When the AV file does not contain data of an intro-music, bit 6 is 0. When the AV file contains data of an intro-music, bit 6 is 1. When the AV file contains data of an intro-music, bit 7 is 0. When an AV file designated by property data contains data of an intro-music, bit 7 is 1. Bits 8 to 15 are reserved.

**[0049]** Fig. 9 shows a table of an example of the structure of the title track 63. According to the embodiment of the present invention, a title can be registered to each AV file to be searched. The registered title is placed as real data in the movie data portion. The data length and the start position of the title of each AV file are represented with the title track. As shown in Fig. 9, the title track is defined as a chunk corresponding to title data of each AV file. Each of AV File Title #1, AV File Title #2, ..., and AV File Title #n defined as chunks of title data of the individual AV files has a data length (variable length represented in bytes)  $L\_AT1$ ,  $L\_AT2$ , ..., and  $L\_ATn$  and a start byte position 0,  $L\_AT1$ ,  $L\_AT1 + L\_AT2$ , ...

**[0050]** Fig. 10 shows an example of the structure of the thumbnail picture track 64. According to the embodiment of the present invention, one thumbnail picture can be registered to each AV file to be searched. The registered thumbnail picture is placed as real data in the movie data portion. The data length and the start position of a thumbnail picture of each AV file are represented with the thumbnail track. Each of AV File Thumbnail #1, AV File Thumbnail #2, ..., and AV File Thumbnail #n defined as chunks of thumbnail data of individual AV files has a data length (variable length represented in bytes)  $L\_TH1$ ,  $L\_TH2$ , ..., and  $L\_THn$  and a start byte position 0,  $L\_TH1$ ,  $L\_TH1 + L\_TH2$ , ...

**[0051]** Fig. 11 shows an example of the structure of the intro-music track 65. According to the embodiment of the present invention, one intro-portion (of for example the first five seconds) of audio data can be registered to each AV file to be searched. An intro-music to be registered is placed as real data in the movie data portion. The data length and the start position of an intro-music of each AV file are represented with the intro-music track. Each of AV File Intro Music #1, AV File Intro Music #2, ..., and AV File Intro Music #n defined as chunks of intro-musics of individual AV files has a data length (variable length represented in bytes)  $L\_IS1$ ,  $L\_IS2$ , ..., and  $L\_ISn$  and a start byte position 0,  $L\_IS1$ ,  $L\_IS1 + L\_IS2$ , ...

**[0052]** In the QuickTime movie file format, data contained in the property track 62, the title track 63, the thumbnail picture track 64, the intro-music track 65, and so forth is represented in the QuickTime movie file for-

mat as shown in Fig. 12. As was described above, the medium information portion of each track of the movie resource portion contains a sample size table and a chunk offset table (see Fig. 4). The sample size tables of the property track 62, the title track 63, the thumbnail picture track 64, and the intro-music track 65 contain property data, title data, thumbnail picture data, and intro-music data of each AV file.

**[0053]**  $S11$ ,  $S12$ , ...,  $S1n$  represent the sizes of property data of AV File #1, AV File #2, ..., and AV File #n, respectively.  $S31$ ,  $S32$ , ...,  $S3n$  represent the sizes of data of thumbnail pictures of AV File #1, AV File #2, ..., and AV File #n, respectively.  $S41$ ,  $S42$ , ..., and  $S4n$  represent the sizes of intro-music data of AV File #1, AV File #2, ..., and AV File #n, respectively.

**[0054]** Likewise, the chunk offset table contains record start byte positions of the property, the title, the thumbnail picture data, and the intro-music data of each AV file.  $O11$ ,  $O12$ , ..., and  $O1n$  represent the start byte positions of property data of AV File #1, AV File #2, ..., and AV File #n, respectively.  $O21$ ,  $O22$ , ...,  $O2n$  represent the start byte positions of the titles of AV File #1, AV File #2, ..., and AV File #n, respectively.  $O31$ ,  $O32$ , ..., and  $O3n$  represent the start byte positions of the thumbnail pictures of AV File #1, AV File #2, ..., and AV File #n, respectively.  $O41$ ,  $O42$ , ..., and  $O4n$  represent the start byte positions of the intro-music data of AV File #1, AV File #2, ..., and AV File #n, respectively.

**[0055]** In the above-described structure, the property data, the title data, the thumbnail picture data, the intro-music data, and so forth of each AV file can be accurately accessed in the movie data portion.

**[0056]** In the above description, data to be searched is output corresponding to an AV index file containing a movie resource portion and a movie data portion. Alternatively, by designating data contained in the movie data portion of another index file with a file containing only a movie resource portion, video data, audio data, and so forth to be searched can be output. Next, such a case will be described. It is assumed that an AV Index File #0 containing a movie resource portion and a movie data portion and an AV Index File #1 containing only a movie resource portion have been recorded as shown in Fig. 13. When bit 0 of the flag area of the property data of AV Index File #0 is "1", recorded data is a set of grouped files or a directory (see Fig. 8). As a source portion of real data contained in a set of grouped files or a directory, AV Index File #1 is designated.

**[0057]** AV Index File #1 contains a part of the movie data portion of AV Index File #0 (for example, the data size, the start byte position, and so forth of each of the property data, the title data, and the thumbnail picture data of each AV file as shown in Fig. 13). Alternatively, AV Index File #1 can designate only a part of movie data portion of AV Index File #0 corresponding to a particular AV file. Thus, only one of stored title data, thumbnail picture data, intro-music data, and so forth can be output so as to search a desired AV file. Alternatively, a process

for outputting data corresponding to only a part of AV files recorded on the record medium can be performed. Thus, the user can filter a search range and then perform a searching operation.

[0058] In addition, data contained in the movie resource portion of the index file may be correlated with data contained in the movie data portion of another index file. For example, when bit 5 of the flag area of the property data of AV Index File #0 is "1", data of the thumbnail picture is contained in a file designated by the property track (see Fig. 8). The designated file is QT Movie File #1. QT Movie File #1 contains a movie resource portion and a movie data portion. The movie data portion contains thumbnail picture data and conventional video data.

[0059] Thus, data to be searched can be handled in other than the above-described index file format. Thus, the format of a file to be searched becomes more flexible. The movie data portion of QT Movie File #1 contains data of the thumbnail picture. Alternatively, the movie data portion may contain title data and intro-music data. In this case, bit 7 of the flag area of the property data of AV Index File #0 is "1".

[0060] When bit 0 of the flag area of the property data is "1" and recorded data is a set of grouped files or a directory, data can be hierarchically handled. In other words, as shown in Fig. 14, index file AVIF0000.MOV containing a movie resource portion and a movie data portion is treated as a root directory. The movie resource portion of AVIF0000.MOV contains the sample size and chunk offset that designate the property data, title data, thumbnail picture data, intro-music data, and so forth contained in the movie data portion of AVIF0000.MOV.

[0061] At this point, since the title data contains a file name, AVIF0001.MOV is designated as a lower hierarchical directory. Since AVIF0001.MOV has the QuickTime movie file format, the property data designates AV000001.MOV and AV000002.MOV as other (lower hierarchical) directories. Thus, data can be hierarchically handled in such a hierarchical file structure.

[0062] As shown in Fig. 15, the index file is recorded at a predetermined position (for example, the innermost peripheral position 21) of the disc shaped record medium 20. When a reproducing and editing mode gets started, the index file is initially reproduced. Thus, when the reproducing and editing mode gets started, a searching screen as shown in Fig. 2 is displayed. Conventional AV files are recorded in the other record area.

[0063] According to the embodiment of the present invention, data of the index file for searching a desired AV file is output using the display panel, the speaker, or the like of the recording apparatus. In addition, the present invention can be applied to the case that the reproducing and editing operation is performed using an external apparatus that outputs video data, audio data, and/or the like.

[0064] The present invention is not limited to the compression-encoding method used in recording video data,

audio data, and/or the like. Instead, the present invention can be applied to data that can be handled in for example QuickTime movie file format.

[0065] According to the embodiments of the present invention, outlined information of each of a plurality of files recorded on a disc shaped record medium is output. With reference to the outlined information, a desired file can be easily searched.

[0066] Thus, when the reproducing and editing operation is performed, data to be operated can be easily accessed and thereby the operability can be improved.

[0067] Although the present invention has been shown and described with respect to illustrative embodiments thereof, it should be understood by those skilled in the art that the foregoing and various other changes, omissions, and additions in the form and detail thereof may be made therein without departing from the spirit and scope of the present invention.

[0068] In so far as the embodiments of the invention described above are implemented at least in part using software-controlled data processing apparatus, it will be appreciated that a computer program providing such software control and a storage medium by which such a computer program is stored are envisaged as aspects of the present invention.

## Claims

1. A digital recording apparatus using a disc shaped record medium, comprising:

means for extracting outlined information of each of a plurality of files recorded on the disc shaped record medium;

means for correlating the extracted outlined information and the plurality of files and generating an index file; and

means for recording the index file to a predetermined position of the disc shaped record medium,


wherein when a predetermined operation mode is performed, a plurality of types of data of the plurality of files are output in a predetermined format.

2. The apparatus as set forth in claim 1, wherein the index file is recorded in the innermost peripheral record area of the disc shaped record medium.


3. The apparatus as set forth in claim 1, wherein when the predetermined operation mode is started, the outlined information is reproduced from the index file and the reproduced outlined information is output in such a manner that it is correlated with each of the plurality of types of data of the plurality of files.

4. The apparatus as set forth in claim 1,  
wherein the predetermined operation mode is  
a reproducing mode and/or an editing mode.
5. The recording apparatus as set forth in claim 1,  
wherein the outlined information contains at-  
tribute data of each of the plurality of types of data  
of the plurality of files.
6. The recording apparatus as set forth in claim 5,  
wherein the attribute data includes date and  
time data that represent the date and time at which  
each of the plurality of types of the plurality of files  
was recorded.
7. The recording apparatus as set forth in claim 5,  
wherein the attribute data includes date and  
time data that represent the date and time at which  
each of the plurality of types of data of the plurality  
of files was changed.
8. The recording apparatus as set forth in claim 5,  
wherein the attribute data includes the dura-  
tion data that represents the duration of each of the  
plurality of types of data of the plurality of files.
9. The recording apparatus as set forth in claim 1,  
wherein the outlined information includes the  
title of each of the plurality of types of data of the  
plurality of files.
10. The recording apparatus as set forth in claim 1,  
wherein the outlined information includes a  
part of video data contained in each of the plurality  
of files.
11. The recording apparatus as set forth in claim 1,  
wherein the outlined information includes a  
part of audio data contained in each of the plurality  
of files.
12. The recording apparatus as set forth in claim 1,  
wherein the index file contains a first area and  
a second area, the first area being composed of an  
aggregation of the outlined information, the second  
area containing correlative information of the out-  
lined information and the remaining data of the files  
and position information representing the positions  
of the outlined information of each of the plurality of  
files.
13. The recording apparatus as set forth in claim 12,  
wherein the second area contains correlative  
information of the outlined information and the re-  
maining data of a group selected from the plurality  
of files.
14. The recording apparatus as set forth in claim 12,  
wherein a resource file is further recorded on  
the disc shaped record medium, the resource file  
containing the same data as the second area, with  
the position information representing the positions  
of the outlined information in the first area, the plu-  
rality of types of data of the plurality of files recorded  
on the disc shaped record medium being able to be  
easily searched when an operation mode including  
a reproducing operation is performed.
15. The recording apparatus as set forth in claim 14,  
wherein the resource file contains information  
for correlating the outlined information and the re-  
maining data of a group selected from the plurality  
of files recorded on the disc shaped record medium.
16. The recording apparatus as set forth in claim 12,  
wherein the second area designates data of  
the first area of another index file.
17. The recording apparatus as set forth in claim 12,  
wherein the second area designates data of  
a different file.
18. The recording apparatus as set forth in claim 17,  
wherein the different file contains the outlined  
information.
19. A digital recording method using a disc shaped  
record medium, comprising the steps of:  
extracting outlined information of each of a plu-  
rality of files recorded on the disc shaped  
record medium;  
correlating the extracted outlined information  
and the plurality of files and generating an index  
file; and  
recording the index file to a predetermined po-  
sition of the disc shaped record medium,  
wherein when an operation mode including a  
reproducing operation is performed, a plurality  
of types of data of the plurality of files are output  
in a predetermined format.
20. A disc shaped record medium for recording a plu-  
rality of files and an index file, the index file cor-  
relating outlines information of the plurality of files and  
the plurality of files, the index file being recorded at  
a predetermined position of the disc shaped record  
medium.

Fig. 1

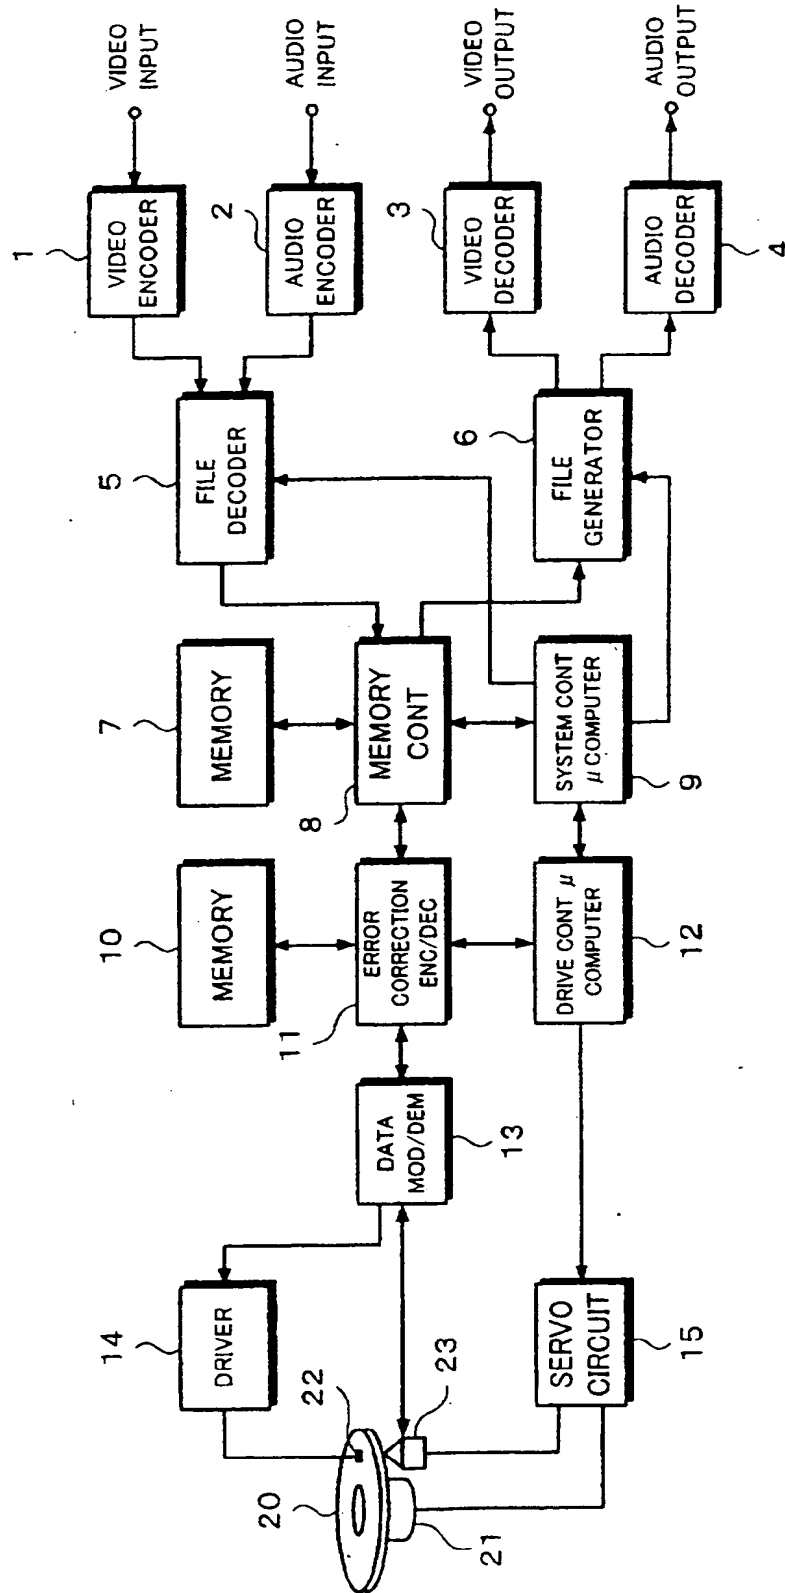

**Fig. 2**

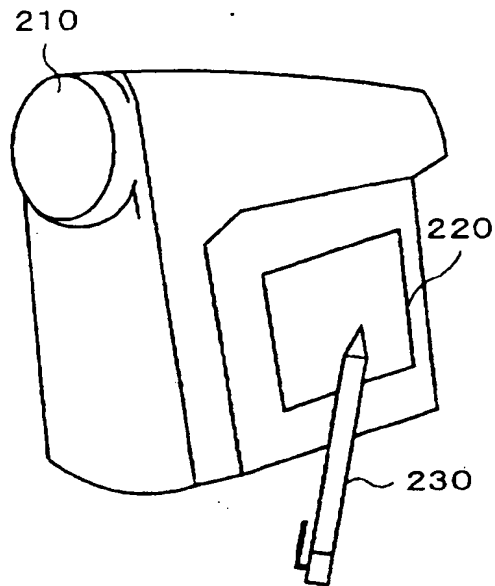

**Fig. 3**



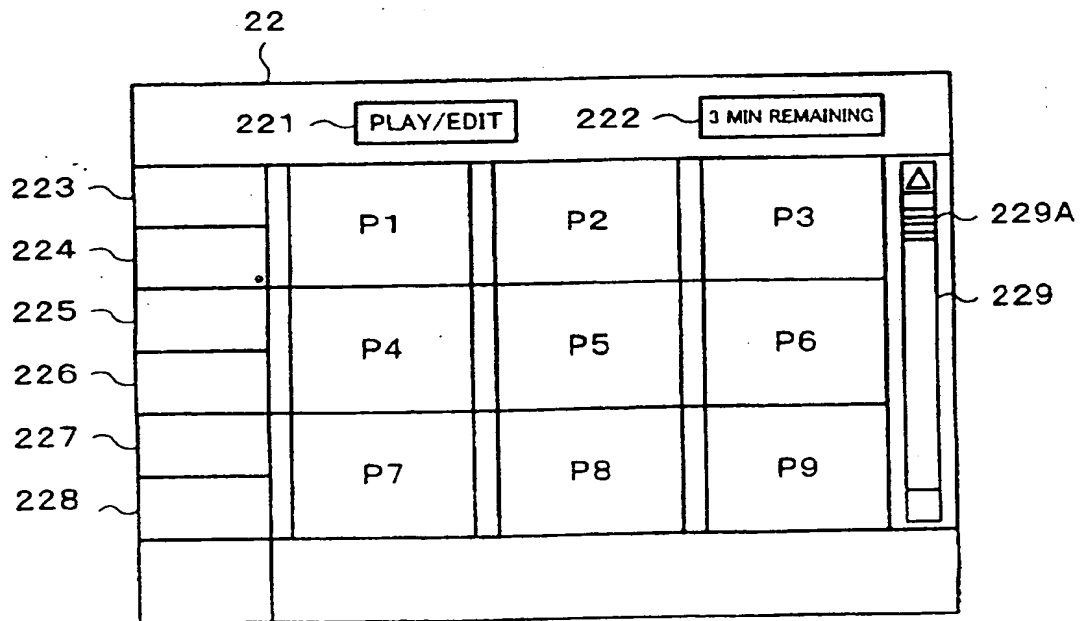


Fig. 4

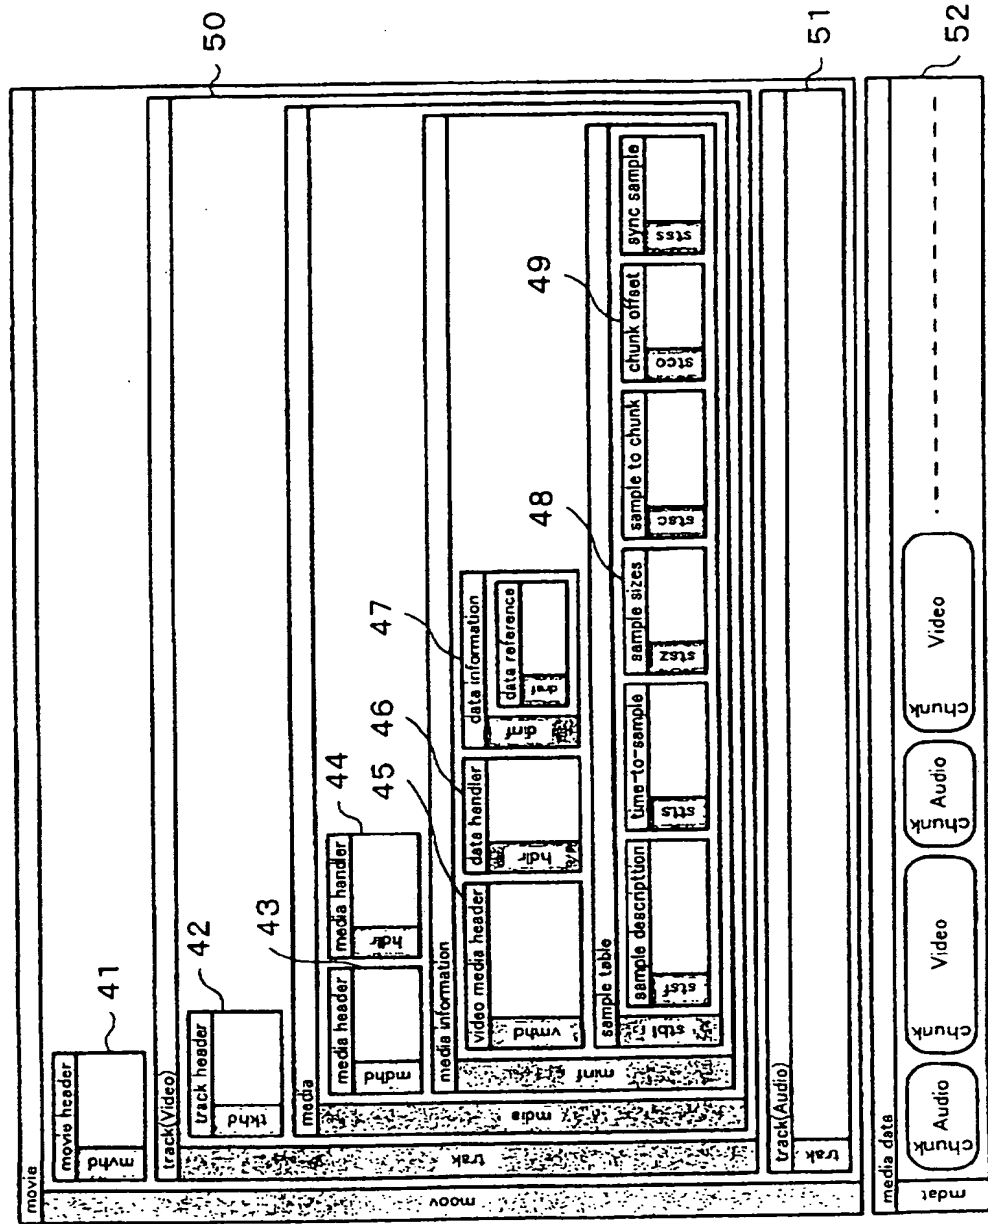

BEST AVAILABLE COPY

Fig. 5

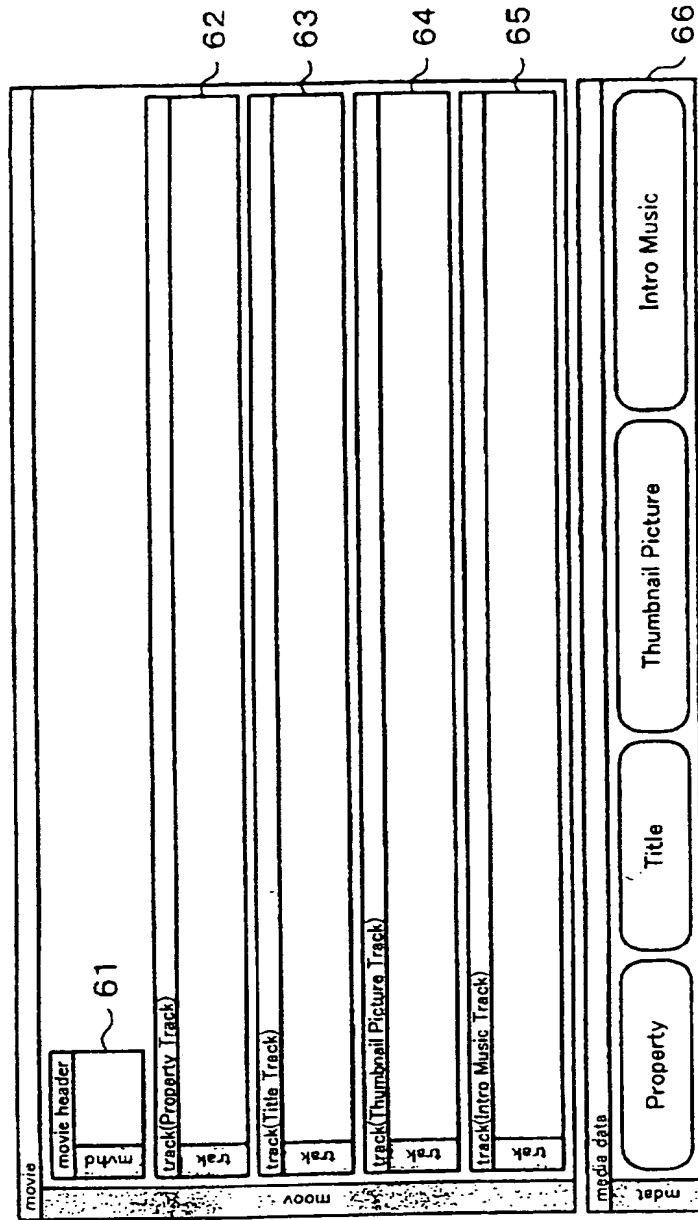

*Fig. 6*

RBP	Length	Length
0	L_AP1	AV File Property #1
L_AP1	L_AP2	AV File Property #2
L_AP1+L_AP2	L_AP3	AV File Property #3
⋮	⋮	⋮
	L_APn	AV File Property #n

*Fig. 7*

RBP	Length	Field Name
0	1	Version
1	2	Flags
3	1	Data Type
4	4	Creation Time
8	4	Modification Time
12	4	Duration
16	L_FI	File Identifier

Fig. 8

BIT	VALUE	DESCRIPTION
0	0	RECORDED DATA IS FILE
	1	RECORDED DATA IS SET OF GROUPED FILES OR DIRECTORY
1	0	AV FILE DOES NOT CONTAIN FILE TO BE REFERENCED
	1	AV FILE CONTAINS FILE TO BE REFERENCED
2	0	AV FILE DOES NOT CONTAIN TITLE
	1	AV FILE CONTAIN TITLE
3	0	AV INDEX FILE CONTAINS DATA OF TITLE
	1	AV FILE DESIGNATED BY DATA OF PROPERTY CONTAINS DATA OF TITLE
4	0	AV FILE DOES NOT CONTAIN THUMBNAI PICTURE
	1	AV FILE CONTAINS THUMBNAI PICTURE
5	0	AV INDEX FILE CONTAINS DATA OF THUMBNAI PICTURE
	1	AV FILE DESIGNATED BY PROPERTY TRACK CONTAINS DATA OF THUMBNAI PICTURE
6	0	AV FILE DOES NOT CONTAIN DATA OF INTRO MUSIC
	1	AV FILE CONTAINS DATA OF INTRO MUSIC
7	0	AV INDEX FILE CONTAINS DATA OF INTRO MUSIC
	1	AV FILE DESIGNATED BY DATA OF PROPERTY CONTAINS DATA OF INTRO MUSIC
OTHERS		RESERVE

**Fig. 9**

RBP	Length	Field Name
0	L_AT1	AV File Title #1
L_AT1	L_AT2	AV File Title #2
L_AT1+L_AT2	L_AT3	AV File Title #3
⋮	⋮	⋮
	L_ATn	AV File Title #n

**Fig. 10**

RBP	Length	Field Name
0	L_TH1	AV File Thumbnail Picture #1
L_TH1	L_TH2	AV File Thumbnail Picture #2
L_TH1+L_TH2	L_TH3	AV File Thumbnail Picture #3
⋮	⋮	⋮
	L_THn	AV File Thumbnail Picture #n

**Fig. 11**

RBP	Length	Field Name
0	L_IS1	AV File Intro Music #1
L_IS1	L_IS2	AV File Intro Music #2
L_IS1+L_IS2	L_IS3	AV File Intro Music #3
⋮	⋮	⋮
	L_ISn	AV File Intro Music #n

Fig. 12




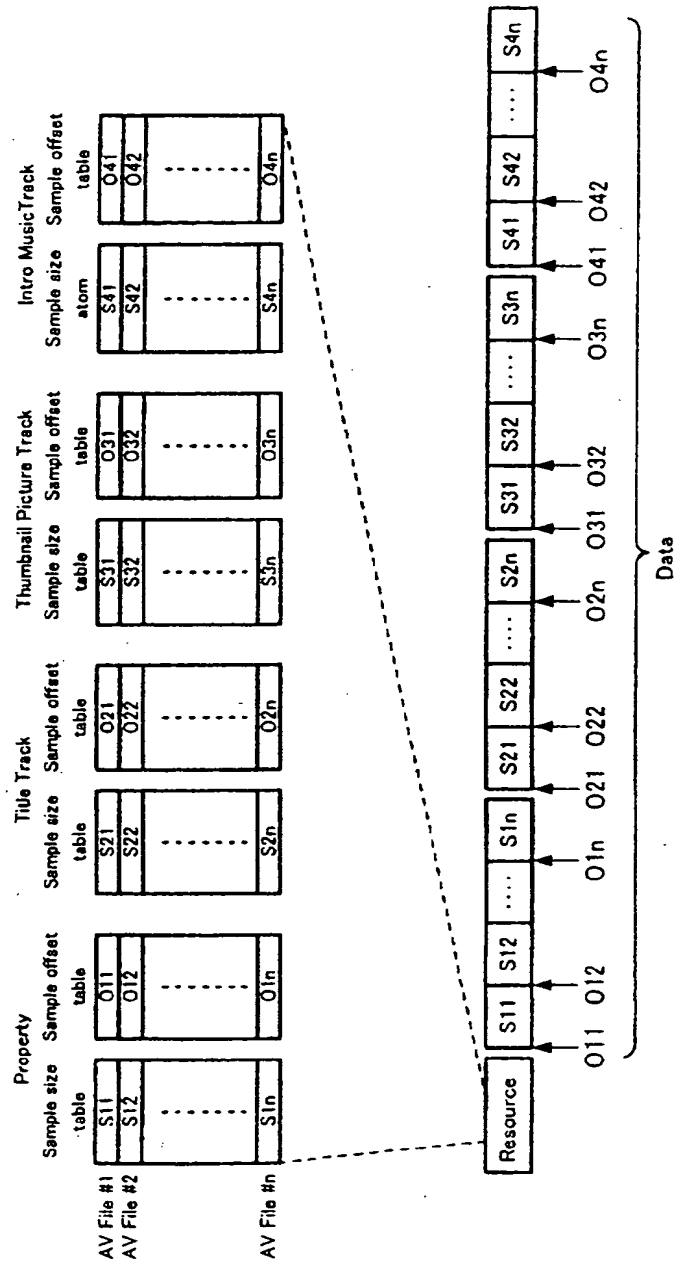


Fig. 13

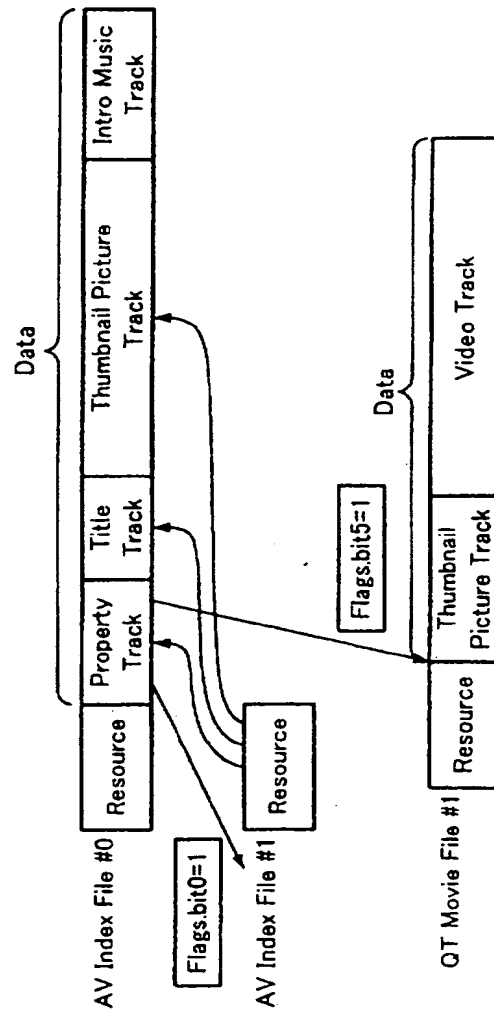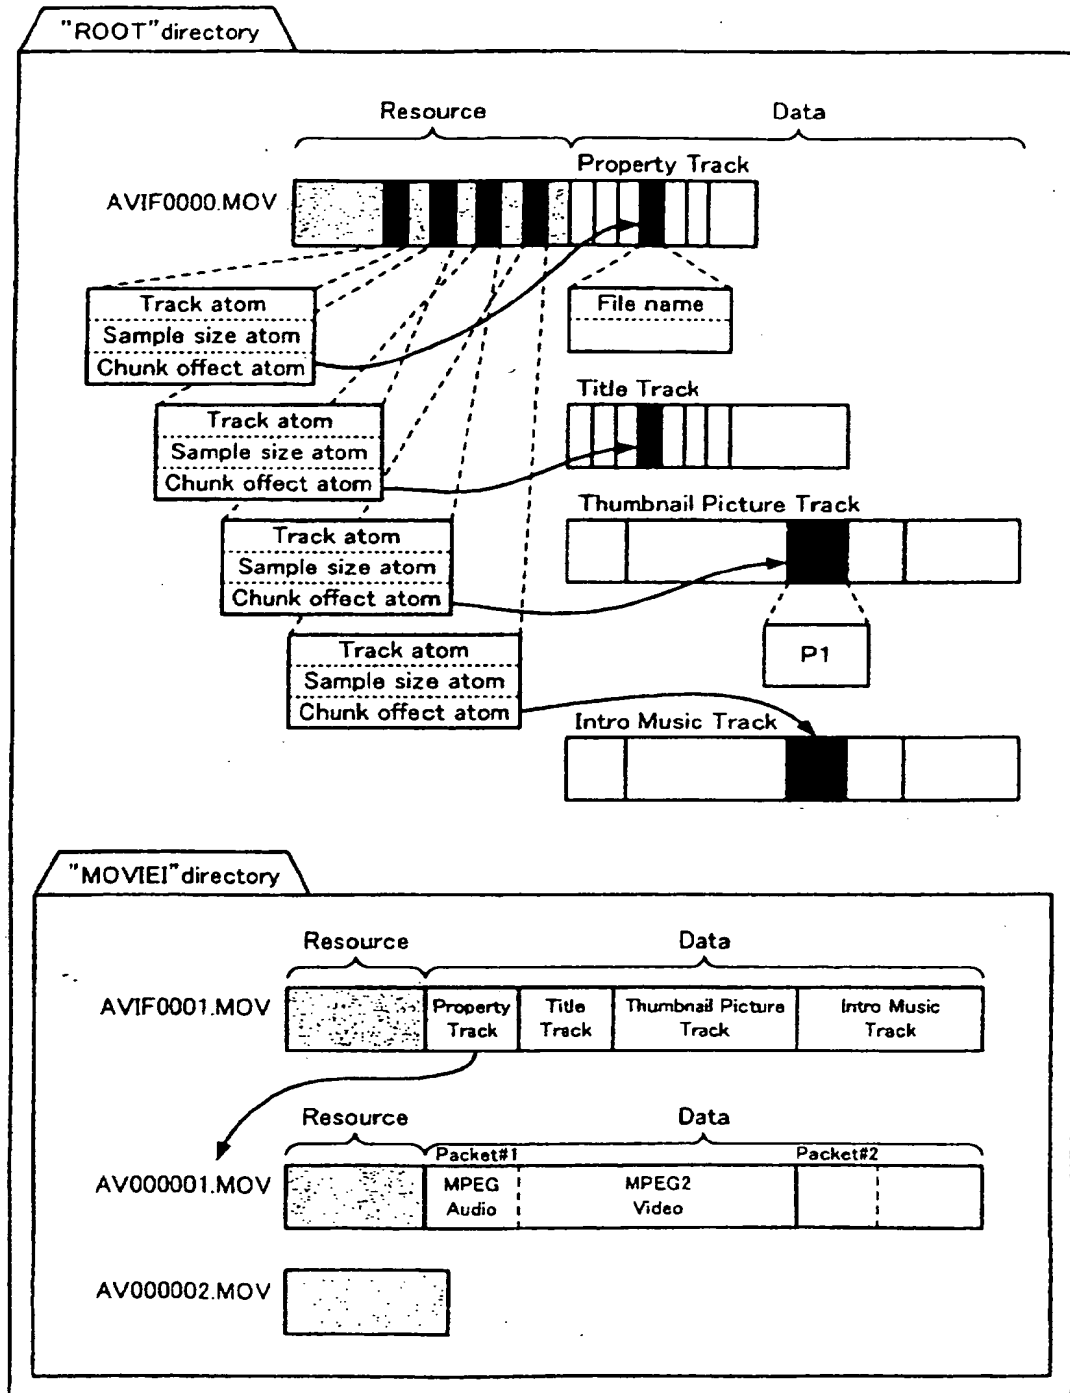

**Fig. 14**

**Fig. 15**

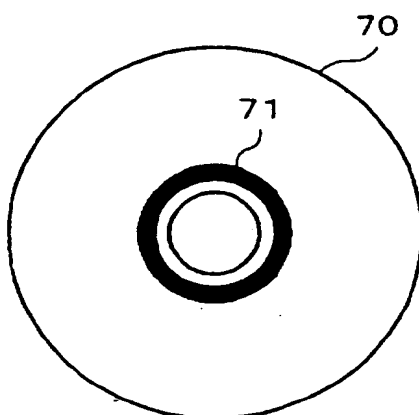

(19)



Deutsches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 085 515 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
02.01.2004 Bulletin 2004/01

(51) Int Cl.7: **G11B 27/32**, G11B 27/034,  
G11B 27/34

(43) Date of publication A2:  
21.03.2001 Bulletin 2001/12

(21) Application number: **00307968.8**

(22) Date of filing: **14.09.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **17.09.1999 JP 26463099**

(71) Applicant: **SONY CORPORATION**  
**Tokyo 141 (JP)**

(72) Inventors:

- **Yamada, Makoto**  
**Shinagawa-ku, Tokyo 141 (JP)**
- **Tsujii, Satoshi**  
**Shinagawa-ku, Tokyo 141 (JP)**
- **Ishizaka, Toshihiro**  
**Shinagawa-ku, Tokyo 141 (JP)**

(74) Representative: **Pratt, Richard Wilson et al**  
**D. Young & Co,**  
**21 New Fetter Lane**  
**London EC4A 1DA (GB)**

(54) **Recording apparatus, recording method, and disc shaped record medium**

(57) A digital recording apparatus using a disc shaped record medium is disclosed, that comprises a means for extracting outlined information of each of a plurality of files recorded on the disc shaped record medium, a means for correlating the extracted outlined information and the plurality of files and generating an in-

dex file, and a means for recording the index file to a predetermined position of the disc shaped record medium, wherein when a predetermined operation mode is performed, a plurality of types of data of the plurality of files are output in a predetermined format.

**EP 1 085 515 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 7968

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 424 903 A (NIPPON DENKI HOME ELECTRONICS; NIPPON ELECTRIC CO (JP)) 2 May 1991 (1991-05-02)	1,3-5, 9-11,19, 20	G11B27/32 G11B27/034 G11B27/34
Y	* abstract * * column 2, line 1 - line 30 * * column 5, line 6 - line 33 * * column 6, line 21 - column 7, line 1 * * figures 6,10,11 *	2	
Y	--- PATENT ABSTRACTS OF JAPAN vol. 1997, no. 12, 25 December 1997 (1997-12-25) & JP 09 213056 A (SHARP CORP), 15 August 1997 (1997-08-15) * abstract *	2	
A	--- US 5 751 281 A (CALLAHAN SEAN MICHAEL ET AL) 12 May 1998 (1998-05-12) * abstract * * column 1, line 11 - line 59 * * column 4, line 60 - column 7, line 58 * * column 9, line 66 - column 10, line 40 * * column 10, line 63 - column 13, line 44 * * figures 3,9,10 * -----	1,19,20	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G11B
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 13 October 2003	Examiner Sucher, R
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

BEST AVAILABLE COPY

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 7968

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-10-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0424903	A	02-05-1991	JP 2712656 B2	16-02-1998
			JP 3141090 A	17-06-1991
			DE 69031203 D1	11-09-1997
			DE 69031203 T2	18-12-1997
			EP 0424903 A2	02-05-1991
			US 6023552 A	08-02-2000
			US 5802245 A	01-09-1998
			US 5559608 A	24-09-1996
-----				
JP 09213056	A	15-08-1997	NONE	
-----				
US 5751281	A	12-05-1998	US 6297830 B1	02-10-2001
-----				

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82